




## 1. Shape & Dimensions (mm)

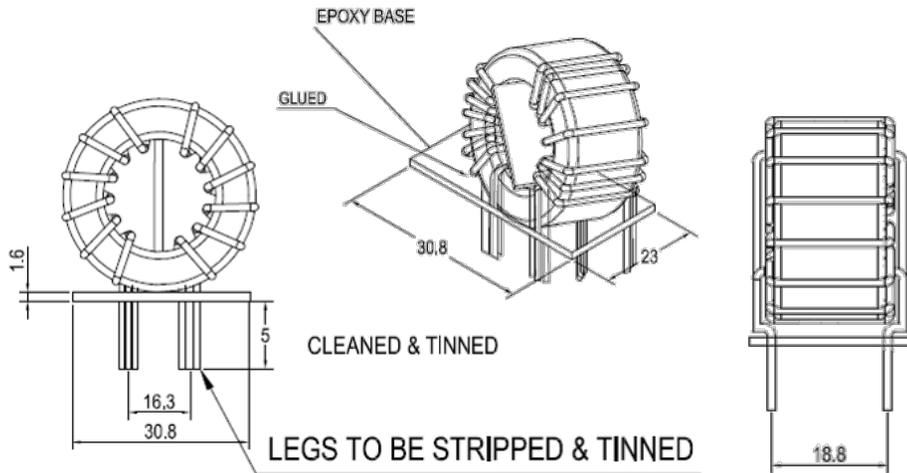

### PCB Footprint

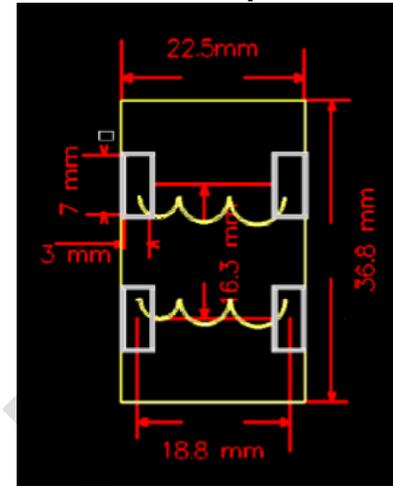

### SLOT SIZE

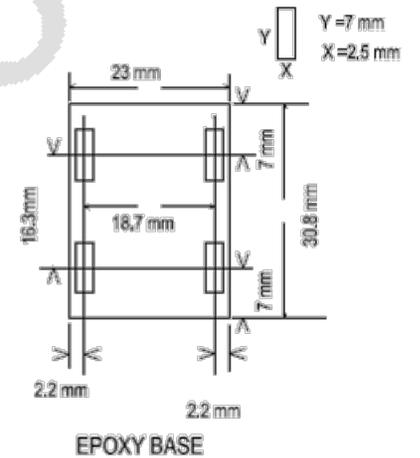

## 2. Electrical Properties

Item	Standard	Test Condition
Inductance L	200uh±30%	10KHz/0.25V
DC Resistance	0.8mOhm Max	@25°C
Hv Test	1.5KV AC	AC 50Hz

### Remark:

Operating temperature (not including self-generated heat): -40°C+85°C

Storage temperature (not including self-package): -40°C+125°C

## 3. Material List

Item	Description
Core	Ferrite
Wire	Copper
Base	Glass Epoxy
Varnish	V1630FS
Adhesive	Epoxy Potting Compound
Solder	Tin

Manufacturer information and UL ILE numbers for all materials available upon request