



1. Shape & Dimensions (mm)

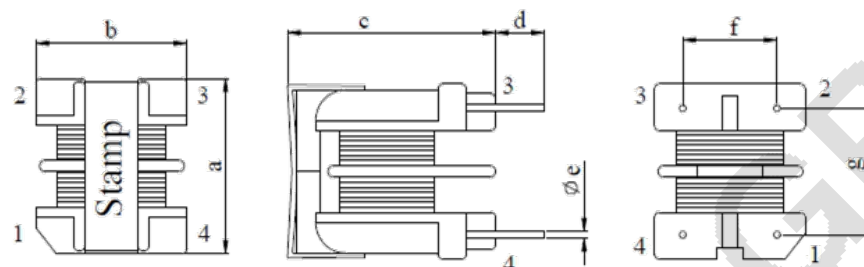

Item	A	B	C	D	E	F	G
Size(mm)	18±1	17±1	21.5±1	3.5±1	0.7±0.1	10±0.5	13±0.5

2. Electrical Properties



Testing Item		Standard
Inductance	N1, N2	≥30mH 1KHz 1V SER @25°C
Turns Ratio	N1:N2	1:1
Hi-Pot	N1/N2	No breakdown 2000VAC 5mA 2S
	Coil/Core	No breakdown 2000VAC 5mA 2S
Insulation Resistance	N1/N2	≥ 100MΩ DC500V
	Coil/Core	

Remarks:

- Operating temperature (not including self-generated heat): -40°C +85°C
- Storage temperature (not including self-package): -40°C +125°C

3. Material List

Item	Description	Material
Bobbin	UU10.5	Plastic
Core	UU10.5	MnZn
Wire	ϕ 0.33mm	180 UEW
Varnish		V1630FS
Core-Tightening Clip		Steel

Manufacturer information and UL ILE numbers for all materials available upon request